

Incremental encoders

Through hollow shaft $\varnothing 27$ mm

10000...320000 pulses per revolution

BHW - HighRes



BHW with through hollow shaft

Features

- High resolution programmable encoder
- Optical sensing method
- Max. 320000 pulses per revolution
- Programmable via BISS
- Small profile depth
- Through hollow shaft $\varnothing 27$ mm

Technical data - electrical ratings

Voltage supply	5 VDC ± 10 % 10...30 VDC
Consumption typ.	80 mA (5 VDC, w/o load) 60 mA (24 VDC, w/o load)
Pulses per revolution	10000...320000
Reference signal	Zero pulse, programmable
Sensing method	Optical
Output frequency	≤ 300 kHz (24K) ≤ 1300 kHz (05A)
Output signals	A 90° B, N + inverted
Output stages	Antivalent Push-pull short-circuit proof
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 61000-6-3
Approval	UL approval / E217823

Technical data - mechanical design

Size (flange)	$\varnothing 80$ mm
Shaft type	$\varnothing 27$ mm (through hollow shaft)
Protection DIN EN 60529	IP 65, IP 42
Operating speed	≤ 12000 rpm (IP 42) ≤ 6000 rpm (IP 65)
Operating torque typ.	0.0075 Nm (IP 42) 0.03 Nm (IP 64)
Materials	Housing: aluminium Flange: aluminium
Operating temperature	-20...+85 °C
Relative humidity	95 % non-condensing
Resistance	DIN EN 60068-2-6 Vibration 10 g, 10-200 Hz DIN EN 60068-2-27 Shock 50 g, 11 ms
Connection	Connector M23, 12-pin Cable 2 m
Weight approx.	500 g

Incremental encoders

Through hollow shaft $\varnothing 27$ mm
10000...320000 pulses per revolution

BHW - HighRes

Terminal assignment

Cable

for connection reference -5

05A

Core colour	Signals	Core colour	Signals
brown	+Vs	brown	+Vs
green	CHA	green	CHA
red	CHA compl.	–	–
yellow	CHB	yellow	CHB
blue	CHB compl.	–	–
pink	CHN	pink	CHN
grey	CHN compl.	–	–
white	0 V	white	0 V

Cable data 8 x 0.14 mm²

Screen: connected to flange

24K

Core colour	Signals	Core colour	Signals
brown	+Vs	brown	+Vs
green	CHA	green	CHA
red	CHA compl.	–	–
yellow	CHB	yellow	CHB
blue	CHB compl.	–	–
pink	CHN	pink	CHN
grey	CHN compl.	–	–
white	0 V	white	0 V

Cable data 5 x 0.14 mm²

Connector M23 male

for connection reference -A


05A, 24K

Connector	Signals
Pin 1	CHA compl.
Pin 2	+Vs
Pin 3	CHN
Pin 4	CHN compl.
Pin 5	CHB
Pin 6	CHB compl.
Pin 7	n.c.
Pin 8	CHA
Pin 9	n.c.
Pin 10	0 V
Pin 11	0 V
Pin 12	+Vs

Output signals


Counter clockwise rotating direction when looking at the flange.

05A

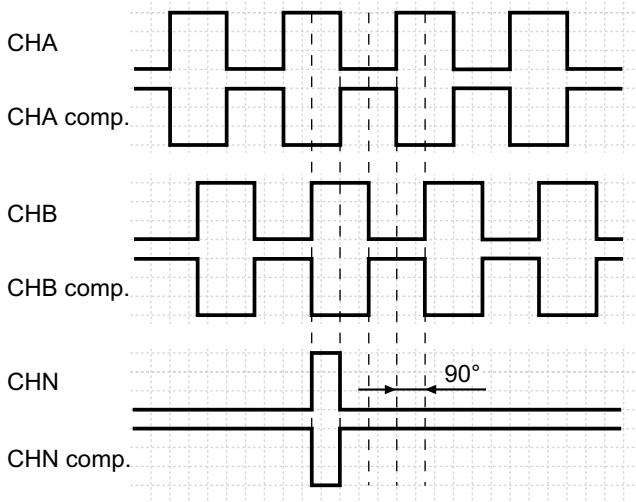

Counter clockwise rotating direction when looking at the flange.

24K

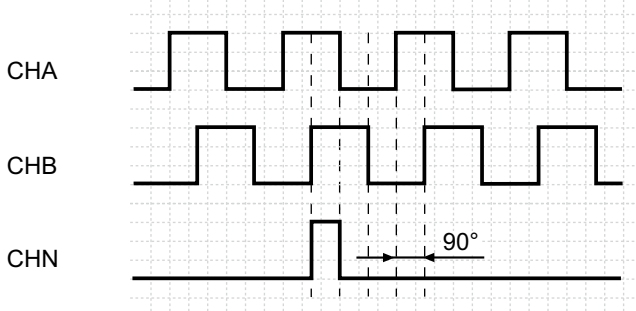

Push-pull version **24K** without CHx complementary signals

