

Overview

- measuring mode: edges, center, width, gap
- 100 ... 150 mm
- pulsed red laser diode
- analog and RS 485
- Touch Display, RS485
- connector M12 8 pin
- -20 ... 50 °C
- IP 67



Picture similar



Technical data

General data

Type	Measuring mode: edges, center, width, gap
Version	PosCon OXE7 - for very precise measurements
Measuring range (width)	48 ... 72 mm
Measuring range (distance)	100 ... 150 mm
Measuring frequency	159 ... 625 Hz
Resolution	20 µm
Repeat accuracy	± 10 µm
Smallest detectable object width	0,7 mm
Smallest detectable gap	1,5 mm
Smallest detectable step	0,7 mm
Linearity error	± 50 ... 75 µm
Temperature drift	< 0,03 % measured value/K
Power on indication	LED green
Output indicator	LED yellow / LED red
Light source	Pulsed red laser diode
Wave length	656 nm
Laser class	1
Optical peak power max.	15 mW
Adjustment	Touch Display, RS485

Electrical data

Response time / release time	3 ... 12,4 ms
------------------------------	---------------

Electrical data

Voltage supply range +Vs	15 ... 28 VDC
Current consumption max. (no load)	150 mA
Output circuit	Analog and RS 485
Output signal	4 ... 20 mA / 0 ... 10 VDC
Switching output	Push-pull
Output function	Out 1 / Alarm
Output current	< 100 mA
Baud rate	115200, adjustable
Reverse polarity protection	Yes, Vs to GND
Short circuit protection	Yes

Mechanical data

Width / diameter	26 mm
Height / length	74 mm
Depth	55 mm
Type	Rectangular, front view
Housing material	Aluminum
Front (optics)	Glass
Connection types	Connector M12 8 pin
Weight	130 g

Ambient conditions

Ambient light immunity	< 35 kLux
Operating temperature	-20 ... +50 °C
Protection class	IP 67

Technical data

Ambient conditions

Storage temperature	-25 ... +75 °C
Vibration (sinusoidal)	IEC 60068-2-6:2008 1.5 mm p-p at f = 10 - 57 Hz, 10 cycles per axis 10 g at f = 58 - 2000 Hz, 10 cycles per axis


Ambient conditions

Shock (semi-sinusoidal)	IEC 60068-2-27:2009 50 g / 11 ms resp. 100 g / 6 ms, 10 jolts per axis and direction 100 g / 2 ms, 5000 jolts per axis and direction
-------------------------	--


Remarks

- Conditions for the following characteristics:
- Measuring frequency 1) 2)
- Resolution 1) 3)
- Repeat accuracy 1) 3)
- Linearity error 1) 4)
- Response time / release time 1) 2) 3)
- 1) Measurement with Baumer standardized measuring equipment and targets. Measuring on 90% reflectivity (white)
- 2) Depending on the size of the measuring field and OBJECT light/dark mode
- 3) Without filtering / no averaging
- 4) Measured symmetrically around the reference point with 50% of the measuring field

Dimension drawing

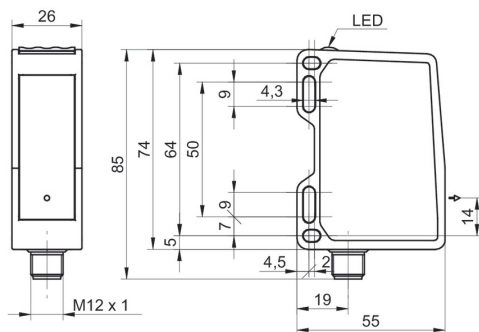

Connection diagram

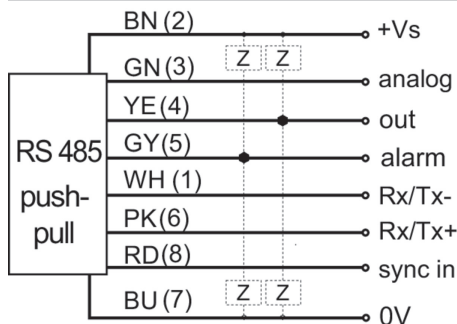


Laser warning

**CLASS 1 LASER
PRODUCT**

IEC 60825-1/2014
Complies with 21 CFR 1040.10 and 1040.11 except for conformance with IEC 60825-1 Ed. 3., as described in Laser Notice No. 56, dated May 8, 2019

Pin assignment



Alignment of the laserline

